



anteprima

[®] GLOBAL 
RADIATORI

RADIATORS FOR ARCHITECTURE



Cover: Anteprima 9 sections, 1800 pipe centres, white sand colour, white grids, 1787 Watt



Anteprima 8 sections, 2000 pipe centres, black mat colour, black grids, 1737 Watt

anteprima

SHADE AND LIGHT: INFINITE BALANCE

Light illuminates surfaces, invades voids, heating sections discard their weight. Shadows emerge from the back wall reallocating consistency to the volumes. Subtracting and adding, to create new perceptions for every change in lighting, supporting the movement that prompts the taste and style of living in the future.



Anteprima 7 sections, 813 pipe centres, white glossy colour, white grids, 697 Watt



Anteprima 14 sections, 1200 pipe centres, black matt colour, black grids, 1959 Watt

1
RADIATOR


∞
INSPIRATIONS

17
dimensions in
HEIGHT

20
dimensions in
LENGTH

11
possible
HYDRAULIC
CONNECTIONS

10
finish
COLOURS

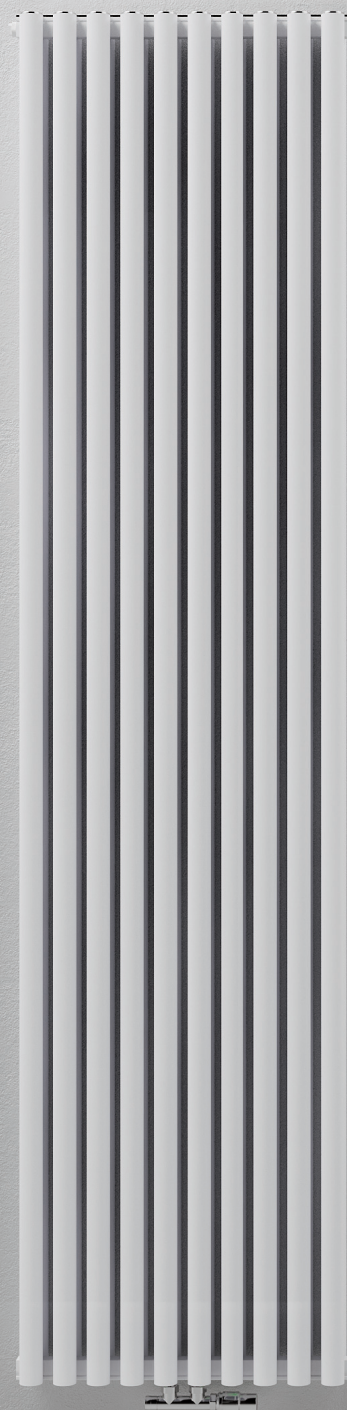

The Global radiators convey our values: to improve the quality of life. They are manufactured based on professional skills and experience, creativity, research, development and advanced technologies that respect the environment.

LOW TEMPERATURES

Global radiators can be installed in combination with standard or condensing boilers, boilers using natural gas, diesel, wood or pellets, operating at both normal and low temperatures or with heat pumps.

HIGH HEAT OUTPUT

Guaranteed by the tests conducted pursuant to the EN 442 Standard by the Politecnico di Milano. The high heat output allows the installation of space-saving radiators and efficient use even in low-temperature installations.

ENERGY SAVING WITH MAXIMUM COMFORT

With the Global radiators the regulation of the temperature is easy and inexpensive. An ideal temperature for every environment according to personal needs is rapidly achieved.

VERY LONG DURATION

Thanks to the high quality of the material, that gives the maximum guarantee of resistance and duration. The double protection in the "anaphoresis-bath" followed with epoxy power enameling guarantees a perfect and durable finish.

EASIER INSTALLATION

Due to the lightness of the aluminum and the sectional elements that allow greater ease and flexibility of installation.

CERTIFIED QUALITY

ICIM has certified the GLOBAL Quality Management System (ISO 9001 standard) and the Environmental Management System (ISO 14001 standard).



Anteprima 10 sections, 1400 pipe centres, black matt colour, black grids, 1600 Watt, with accessories

ANTEPRIMA	n. of sections	dimensions mm				Ø connec- tions	empty weight Kg ca.	contents water litres	heat output EN 442		exponent n	coefficient Km
		A overall height	B width	C depht	D pipe centres				ΔT 50°C	ΔT 30°C		
									Watt	Watt		
350	6	384	300	95	350	1/2"	4,2	0,6	288	145	1,35335	1,44696
	7	384	350	95	350	1/2"	4,9	0,7	336	169	1,35335	1,68812
	8	384	400	95	350	1/2"	5,6	0,8	384	193	1,35335	1,92928
	9	384	450	95	350	1/2"	6,3	0,9	432	217	1,35335	2,17044
	10	384	500	95	350	1/2"	7,0	1,0	480	241	1,35335	2,41160
	11	384	550	95	350	1/2"	7,7	1,2	528	265	1,35335	2,65276
	12	384	600	95	350	1/2"	8,4	1,3	576	289	1,35335	2,89392
	13	384	650	95	350	1/2"	9,1	1,4	624	313	1,35335	3,13508
	14	384	700	95	350	1/2"	9,8	1,5	672	337	1,35335	3,37624
	15	384	750	95	350	1/2"	10,5	1,6	720	362	1,35335	3,61740
	16	384	800	95	350	1/2"	11,2	1,7	768	386	1,35335	3,85856
	17	384	850	95	350	1/2"	11,9	1,8	816	410	1,35335	4,09972
	18	384	900	95	350	1/2"	12,6	1,9	864	434	1,35335	4,34088
	19	384	950	95	350	1/2"	13,3	2,0	912	458	1,35335	4,58204
	20	384	1000	95	350	1/2"	14,0	2,1	960	482	1,35335	4,82320
	21	384	1050	95	350	1/2"	14,7	2,2	1008	506	1,35335	5,06436
	22	384	1100	95	350	1/2"	15,4	2,3	1056	530	1,35335	5,30552
	23	384	1150	95	350	1/2"	16,1	2,4	1104	554	1,35335	5,54668
	24	384	1200	95	350	1/2"	16,8	2,5	1152	578	1,35335	5,78784
500	6	534	300	95	500	1/2"	5,4	0,8	391	197	1,34756	2,00970
	7	534	350	95	500	1/2"	6,3	0,9	456	230	1,34756	2,34465
	8	534	400	95	500	1/2"	7,2	1,1	522	262	1,34756	2,67960
	9	534	450	95	500	1/2"	8,1	1,2	587	295	1,34756	3,01455
	10	534	500	95	500	1/2"	9,0	1,3	652	328	1,34756	3,34950
	11	534	550	95	500	1/2"	9,9	1,5	717	361	1,34756	3,68445
	12	534	600	95	500	1/2"	10,8	1,6	782	394	1,34756	4,01940
	13	534	650	95	500	1/2"	11,7	1,7	848	426	1,34756	4,35435
	14	534	700	95	500	1/2"	12,6	1,9	913	459	1,34756	4,68930
	15	534	750	95	500	1/2"	13,5	2,0	978	492	1,34756	5,02425
	16	534	800	95	500	1/2"	14,4	2,1	1043	525	1,34756	5,35920
	17	534	850	95	500	1/2"	15,3	2,2	1108	558	1,34756	5,69415
	18	534	900	95	500	1/2"	16,2	2,4	1174	590	1,34756	5,02910
	19	534	950	95	500	1/2"	17,1	2,5	1239	623	1,34756	6,36405
	20	534	1000	95	500	1/2"	18,0	2,6	1304	656	1,34756	6,69900
	21	534	1050	95	500	1/2"	18,9	2,8	1369	689	1,34756	7,03395
	22	534	1100	95	500	1/2"	19,8	2,9	1434	722	1,34756	7,36890
	23	534	1150	95	500	1/2"	20,7	3,0	1500	754	1,34756	7,70385
	24	534	1200	95	500	1/2"	21,6	3,2	1565	787	1,34756	8,03880
530	6	564	300	95	530	1/2"	5,7	0,8	412	207	1,34640	2,12346
	7	564	350	95	530	1/2"	6,7	1,0	480	242	1,34640	2,47737
	8	564	400	95	530	1/2"	7,6	1,1	549	276	1,34640	2,83128
	9	564	450	95	530	1/2"	8,6	1,2	617	311	1,34640	3,18519
	10	564	500	95	530	1/2"	9,5	1,4	686	345	1,34640	3,53910
	11	564	550	95	530	1/2"	10,5	1,5	755	380	1,34640	3,89301
	12	564	600	95	530	1/2"	11,4	1,7	823	414	1,34640	4,24692
	13	564	650	95	530	1/2"	12,4	1,8	892	449	1,34640	4,60083
	14	564	700	95	530	1/2"	13,3	1,9	960	483	1,34640	4,95474
	15	564	750	95	530	1/2"	14,3	2,1	1029	518	1,34640	5,30865
	16	564	800	95	530	1/2"	15,2	2,2	1098	552	1,34640	5,66256
	17	564	850	95	530	1/2"	16,2	2,3	1166	587	1,34640	6,01647
	18	564	900	95	530	1/2"	11,1	2,5	1235	621	1,34640	6,37038
	19	564	950	95	530	1/2"	18,1	2,6	1303	656	1,34640	6,72429
	20	564	1000	95	530	1/2"	19,0	2,8	1372	690	1,34640	7,07820
	21	564	1050	95	530	1/2"	20,0	2,9	1441	725	1,34640	7,43211
	22	564	1100	95	530	1/2"	20,9	3,0	1509	759	1,34640	7,78602
	23	564	1150	95	530	1/2"	21,9	3,2	1578	794	1,34640	8,13993
	24	564	1200	95	530	1/2"	22,8	3,3	1646	828	1,34640	8,49384

ANTEPRIMA	n. of sections	dimensions mm				Ø connec- tions	empty weight Kg ca.	contents water litres	heat output EN 442		exponent n	coefficient Km
		A overall height	B width	C depht	D pipe centres				ΔT 50°C	ΔT 30°C		
									Watt	Watt		
600	6	634	300	95	600	1/2"	6,3	0,9	458	231	1,34370	2,39028
	7	634	350	95	600	1/2"	7,4	1,1	535	270	1,34370	2,78866
	8	634	400	95	600	1/2"	8,4	1,2	611	308	1,34370	3,18704
	9	634	450	95	600	1/2"	9,5	1,4	688	347	1,34370	3,58542
	10	634	500	95	600	1/2"	10,5	1,5	764	385	1,34370	3,98380
	11	634	550	95	600	1/2"	11,6	1,7	840	424	1,34370	4,38218
	12	634	600	95	600	1/2"	12,6	1,8	917	462	1,34370	4,78056
	13	634	650	95	600	1/2"	13,7	2,0	993	501	1,34370	5,17894
	14	634	700	95	600	1/2"	14,7	2,1	1070	539	1,34370	5,57732
	15	634	750	95	600	1/2"	15,8	2,3	1146	578	1,34370	5,97570
	16	634	800	95	600	1/2"	16,8	2,4	1222	616	1,34370	6,37408
	17	634	850	95	600	1/2"	17,9	2,6	1299	655	1,34370	6,77246
	18	634	900	95	600	1/2"	18,9	2,7	1375	693	1,34370	7,17084
	19	634	950	95	600	1/2"	20,0	2,9	1452	732	1,34370	7,56922
	20	634	1000	95	600	1/2"	21,0	3,0	1528	770	1,34370	7,96760
	21	634	1050	95	600	1/2"	22,1	3,2	1604	809	1,34370	8,36598
	22	634	1100	95	600	1/2"	23,1	3,3	1681	847	1,34370	8,76436
	23	634	1150	95	600	1/2"	24,2	3,5	1757	886	1,34370	9,16274
	24	634	1200	95	600	1/2"	25,2	3,6	1834	924	1,34370	9,56112
623	6	657	300	95	623	1/2"	6,6	0,9	474	239	1,34281	2,47836
	7	657	350	95	623	1/2"	7,7	1,1	553	279	1,34281	2,89142
	8	657	400	95	623	1/2"	8,8	1,2	632	318	1,34281	3,30448
	9	657	450	95	623	1/2"	9,9	1,4	711	358	1,34281	3,71754
	10	657	500	95	623	1/2"	11,0	1,5	790	398	1,34281	4,13060
	11	657	550	95	623	1/2"	12,1	1,7	869	438	1,34281	4,54366
	12	657	600	95	623	1/2"	13,2	1,9	948	478	1,34281	4,95672
	13	657	650	95	623	1/2"	14,3	2,0	1027	517	1,34281	5,36978
	14	657	700	95	623	1/2"	15,4	2,2	1106	557	1,34281	5,78284
	15	657	750	95	623	1/2"	16,5	2,3	1185	597	1,34281	6,19590
	16	657	800	95	623	1/2"	17,6	2,5	1264	637	1,34281	6,60896
	17	657	850	95	623	1/2"	18,7	2,6	1343	677	1,34281	7,02202
	18	657	900	95	623	1/2"	19,8	2,8	1422	716	1,34281	7,43508
	19	657	950	95	623	1/2"	20,9	2,9	1501	756	1,34281	7,84814
	20	657	1000	95	623	1/2"	22,0	3,1	1580	796	1,34281	8,26120
	21	657	1050	95	623	1/2"	23,1	3,2	1659	836	1,34281	8,67426
	22	657	1100	95	623	1/2"	24,2	3,4	1738	876	1,34281	9,08732
	23	657	1150	95	623	1/2"	25,3	3,6	1817	915	1,34281	9,50038
	24	657	1200	95	623	1/2"	26,4	3,7	1896	955	1,34281	9,91344
700	6	734	300	95	700	1/2"	7,5	1,0	524	265	1,33983	2,77578
	7	734	350	95	700	1/2"	8,8	1,2	612	309	1,33983	3,23841
	8	734	400	95	700	1/2"	10,0	1,4	699	353	1,33983	3,70104
	9	734	450	95	700	1/2"	11,3	1,5	787	397	1,33983	4,16367


ANTEPRIMA	n. of sections	dimensions mm				Ø connec- tions	empty weight Kg ca.	contents water litres	heat output EN 442		exponent n	coefficient Km
		A overall height	B width	C depht	D pipe centres				ΔT 50°C	ΔT 30°C		
									Watt	Watt		
730	6	764	300	95	730	1/2"	7,8	1,0	544	275	1,33868	2,89224
	7	764	350	95	730	1/2"	9,1	1,2	635	321	1,33868	3,37428
	8	764	400	95	730	1/2"	10,4	1,4	726	366	1,33868	3,85632
	9	764	450	95	730	1/2"	11,7	1,6	816	412	1,33868	4,33836
	10	764	500	95	730	1/2"	13,0	1,7	907	458	1,33868	4,82040
	11	764	550	95	730	1/2"	14,3	1,9	998	504	1,33868	5,30244
	12	764	600	95	730	1/2"	15,6	2,1	1088	550	1,33868	5,78448
	13	764	650	95	730	1/2"	16,9	2,3	1179	595	1,33868	6,26652
	14	764	700	95	730	1/2"	18,2	2,4	1270	641	1,33868	6,74856
	15	764	750	95	730	1/2"	19,5	2,6	1361	687	1,33868	7,23060
	16	764	800	95	730	1/2"	20,8	2,8	1451	733	1,33868	7,71264
	17	764	850	95	730	1/2"	22,1	3,0	1542	779	1,33868	8,19468
	18	764	900	95	730	1/2"	23,4	3,1	1633	824	1,33868	8,67672
	19	764	950	95	730	1/2"	24,7	3,3	1723	870	1,33868	9,15876
	20	764	1000	95	730	1/2"	26,0	3,5	1814	916	1,33868	9,64080
	21	764	1050	95	730	1/2"	27,3	3,7	1905	962	1,33868	10,12284
	22	764	1100	95	730	1/2"	28,6	3,8	1995	1008	1,33868	10,60488
	23	764	1150	95	730	1/2"	29,9	4,0	2086	1053	1,33868	11,08692
	24	764	1200	95	730	1/2"	31,2	4,2	2177	1099	1,33868	11,56896
800	6	834	300	95	800	1/2"	8,4	1,1	589	298	1,33597	3,16680
	7	834	350	95	800	1/2"	9,8	1,3	687	347	1,33597	3,69460
	8	834	400	95	800	1/2"	11,2	1,5	786	397	1,33597	4,22240
	9	834	450	95	800	1/2"	12,6	1,7	884	446	1,33597	4,75020
	10	834	500	95	800	1/2"	14,0	1,9	982	496	1,33597	5,27800
	11	834	550	95	800	1/2"	15,4	2,1	1080	546	1,33597	5,80580
	12	834	600	95	800	1/2"	16,8	2,2	1178	595	1,33597	6,33360
	13	834	650	95	800	1/2"	18,2	2,4	1277	645	1,33597	6,86140
	14	834	700	95	800	1/2"	19,6	2,6	1375	694	1,33597	7,38920
	15	834	750	95	800	1/2"	21,0	2,8	1473	744	1,33597	7,91700
	16	834	800	95	800	1/2"	22,4	3,0	1571	794	1,33597	8,44480
	17	834	850	95	800	1/2"	23,8	3,2	1669	843	1,33597	8,97260
	18	834	900	95	800	1/2"	25,2	3,4	1768	893	1,33597	9,50040
	19	834	950	95	800	1/2"	26,6	3,6	1866	942	1,33597	10,02820
	20	834	1000	95	800	1/2"	28,0	3,7	1964	992	1,33597	10,55600
	21	834	1050	95	800	1/2"	29,4	3,9	2062	1042	1,33597	11,08380
	22	834	1100	95	800	1/2"	30,8	4,1	2160	1091	1,33597	11,61160
	23	834	1150	95	800	1/2"	32,2	4,3	2259	1141	1,33597	12,13940
	24	834	1200	95	800	1/2"	33,6	4,5	2357	1190	1,33597	12,66720
813	6	847	300	95	813	1/2"	8,7	1,1	598	302	1,33547	3,21792
	7	847	350	95	813	1/2"	10,2	1,3	697	353	1,33547	3,75424
	8	847	400	95	813	1/2"	11,6	1,5	797	403	1,33547	4,29056
	9	847	450	95	813	1/2"	13,1	1,7	896	454	1,33547	4,82688
	10	847	500	95	813	1/2"	14,5	1,9	996	504	1,33547	5,36320
	11	847	550	95	813	1/2"	16,0	2,1	1096	554	1,33547	5,89952
	12	847	600	95	813	1/2"	17,4	2,3	1195	605	1,33547	6,43584
	13	847	650	95	813	1/2"	18,9	2,5	1295	655	1,33547	6,97216
	14	847	700	95	813	1/2"	20,3	2,7	1394	706	1,33547	7,50848
	15	847	750	95	813	1/2"	21,8	2,8	1494	756	1,33547	8,04480
	16	847	800	95	813	1/2"	23,2	3,0	1594	806	1,33547	8,58112
	17	847	850	95	813	1/2"	24,7	3,2	1693	857	1,33547	9,11744
	18	847	900	95	813	1/2"	26,1	3,4	1793	907	1,33547	9,65376
	19	847	950	95	813	1/2"	27,6	3,6	1892	958	1,33547	10,19008
	20	847	1000	95	813	1/2"	29,0	3,8	1992	1008	1,33547	10,72640
	21	847	1050	95	813	1/2"	30,5	4,0	2092	1058	1,33547	11,26272
	22	847	1100	95	813	1/2"	31,9	4,2	2191	1109	1,33547	11,79904
	23	847	1150	95	813	1/2"	33,4	4,4	2291	1159	1,33547	12,33563
	24	847	1200	95	813	1/2"	34,8	4,5	2390	1210	1,33547	12,87168

ANTEPRIMA	n. of sections	dimensions mm				Ø connec- tions	empty weight Kg ca.	contents water litres	heat output EN 442		exponent n	coefficient Km	
		A overall height	B width	C depht	D pipe centres				ΔT 50°C	ΔT 30°C			
									Watt	Watt			
900	4	934	200	95	900	1/2"	6,4	0,8	436	220	1,33211	2,37572	
	5	934	250	95	900	1/2"	8,0	1,0	545	276	1,33211	2,96965	
	6	934	300	95	900	1/2"	9,6	1,2	653	331	1,33211	3,56358	
	7	934	350	95	900	1/2"	11,2	1,4	762	386	1,33211	4,15751	
	8	934	400	95	900	1/2"	12,8	1,6	871	441	1,33211	4,75144	
	9	934	450	95	900	1/2"	14,4	1,8	980	496	1,33211	5,34537	
	10	934	500	95	900	1/2"	16,0	2,1	1089	551	1,33211	5,93930	
	11	934	550	95	900	1/2"	17,6	2,3	1198	606	1,33211	6,53323	
	12	934	600	95	900	1/2"	19,2	2,5	1307	661	1,33211	7,12716	
	13	934	650	95	900	1/2"	20,8	2,7	1416	716	1,33211	7,72109	
	14	934	700	95	900	1/2"	22,4	2,9	1525	771	1,33211	8,31502	
	15	934	750	95	900	1/2"	24,0	3,1	1634	827	1,33211	8,90895	
	16	934	800	95	900	1/2"	25,6	3,3	1742	882	1,33211	9,50288	
	17	934	850	95	900	1/2"	27,2	3,5	1851	937	1,33211	10,09681	
	18	934	900	95	900	1/2"	28,8	3,7	1960	992	1,33211	10,69074	
	19	934	950	95	900	1/2"	30,4	3,9	2069	1047	1,33211	11,28467	
	20	934	1000	95	900	1/2"	32,0	4,1	2178	1102	1,33211	11,87860	
	21	934	1050	95	900	1/2"	33,6	4,3	2287	1157	1,33211	12,47253	
	22	934	1100	95	900	1/2"	35,2	4,5	2396	1212	1,33211	13,06646	
	23	934	1150	95	900	1/2"	36,8	4,7	2505	1267	1,33211	13,66039	
	24	934	1200	95	900	1/2"	38,4	4,9	2614	1322	1,33211	14,25432	
	1000	4	1034	200	95	1000	1/2"	7,2	0,9	478	240	1,34265	2,49960
		5	1034	250	95	1000	1/2"	9,0	1,1	597	301	1,34265	3,12450
		6	1034	300	95	1000	1/2"	10,8	1,3	716	361	1,34265	3,74940
7		1034	350	95	1000	1/2"	12,6	1,6	836	421	1,34265	4,37430	
8		1034	400	95	1000	1/2"	14,4	1,8	955	481	1,34265	4,99920	
9		1034	450	95	1000	1/2"	16,2	2,0	1075	541	1,34265	5,62410	
10		1034	500	95	1000	1/2"	18,8	2,2	1194	601	1,34265	6,24900	
11		1034	550	95	1000	1/2"	19,8	2,5	1313	661	1,34265	6,87390	
12		1034	600	95	1000	1/2"	21,6	2,7	1433	721	1,34265	7,49880	
13		1034	650	95	1000	1/2"	23,4	2,9	1552	781	1,34265	8,12370	
14		1034	700	95	1000	1/2"	25,2	3,1	1672	841	1,34265	8,74860	
15		1034	750	95	1000	1/2"	27,0	3,4	1791	902	1,34265	9,37350	
16		1034	800	95	1000	1/2"	28,8	3,6	1910	962	1,34265	9,99840	
17		1034	850	95	1000	1/2"	30,6	3,8	2030	1022	1,34265	10,62330	
18		1034	900	95	1000	1/2"	32,4	4,0	2149	1082	1,34265	11,24820	
19		1034	950	95	1000	1/2"	34,2	4,2	2269	1142	1,34265	11,87310	
20		1034	1000	95	1000	1/2"	36,0	4,5	2388	1202	1,34265	12,49800	
21		1034	1050	95	1000	1/2"	37,8	4,7	2507	1262	1,34265	13,12290	
22		1034	1100	95	1000	1/2"	39,6	4,9	2627	1322	1,34265	13,74780	
23		1034	1150	95	1000	1/2"	41,4	5,1	2746	1382	1,34265	14,37270	
24		1034	1200	95	1000	1/2"	43,2	5,4	2866	1442	1,34265	14,99760	
1200		4	1234	200	95	1200	1/2"	8,8	1,0	560	279	1,36372	2,69824
		5	1234	250	95	1200	1/2"	11,0	1,3	700	349	1,36372	3,37280
		6	1234	300	95	1200	1/2"	13,2	1,6	839	418	1,36372	4,04736
	7	1234	350	95	1200	1/2"	15,4	1,8	979	488	1,36372	4,72192	
	8	1234	400	95	1200	1/2"	17,6	2,1	1119	558	1,36372	5,39648	
	9	1234	450	95	1200	1/2"	19,8	2,3	1259	627	1,36372	6,07104	
	10	1234	500	95	1200	1/2"	22,0	2,6	1399	697	1,36372	6,74560	
	11	1234	550	95	1200	1/2"	24,2	2,9	1539	767	1,36372	7,42016	
	12	1234	600	95	1200	1/2"	26,4	3,1	1679	836	1,36372	8,09472	
	13	1234	650	95	1200	1/2"	28,6	3,4	1819	906	1,36372	8,76928	
	14	1234	700	95	1200	1/2"	30,8	3,6	1959	976	1,36372	9,44384	
	15	1234	750	95	1200	1/2"	33,0	3,9	2099	1046	1,36372	10,11840	
	16	1234	800	95	1200	1/2"	35,2	4,2	2238	1115	1,36372	10,79269	


ANTEPRIMA	n. of sections	dimensions mm				Ø connec- tions	empty weight Kg ca.	contents water litres	heat output EN 442		exponent n	coefficient Km
		A overall height	B width	C depht	D pipe centres				ΔT 50°C	ΔT 30°C		
									Watt	Watt		
1400	4	1434	200	95	1400	1/2"	9,6	1,2	640	315	1,38479	2,84024
	5	1434	250	95	1400	1/2"	12,0	1,5	800	394	1,38479	3,55030
	6	1434	300	95	1400	1/2"	14,4	1,8	960	473	1,38479	4,26036
	7	1434	350	95	1400	1/2"	16,8	2,1	1120	552	1,38479	4,97042
	8	1434	400	95	1400	1/2"	19,2	2,4	1280	630	1,38479	5,68048
	9	1434	450	95	1400	1/2"	21,6	2,7	1440	709	1,38479	6,39054
	10	1434	500	95	1400	1/2"	24,0	3,0	1600	788	1,38479	7,10060
	11	1434	550	95	1400	1/2"	26,4	3,3	1760	867	1,38479	7,81066
	12	1434	600	95	1400	1/2"	28,8	3,6	1920	946	1,38479	8,52072
	13	1434	650	95	1400	1/2"	31,2	3,9	2080	1024	1,38479	9,23078
	14	1434	700	95	1400	1/2"	33,6	4,2	2240	1103	1,38479	9,94084
	15	1434	750	95	1400	1/2"	36,0	4,4	2400	1182	1,38479	10,65090
	16	1434	800	95	1400	1/2"	38,4	4,7	2560	1261	1,38479	11,36096
1600	4	1634	200	95	1600	1/2"	10,4	1,3	718	355	1,37997	3,24732
	5	1634	250	95	1600	1/2"	13,0	1,7	898	444	1,37997	4,05915
	6	1634	300	95	1600	1/2"	15,6	2,0	1077	532	1,37997	4,87098
	7	1634	350	95	1600	1/2"	18,2	2,3	1257	621	1,37997	5,68281
	8	1634	400	95	1600	1/2"	20,8	2,7	1436	710	1,37997	6,49464
	9	1634	450	95	1600	1/2"	23,4	3,0	1616	798	1,37997	7,30647
	10	1634	500	95	1600	1/2"	26,0	3,3	1795	887	1,37997	8,11830
	11	1634	550	95	1600	1/2"	28,6	3,7	1975	976	1,37997	8,93013
	12	1634	600	95	1600	1/2"	31,2	4,0	2154	1064	1,37997	9,74196
	13	1634	650	95	1600	1/2"	33,8	4,3	2334	1153	1,37997	10,55379
	14	1634	700	95	1600	1/2"	36,4	4,7	2513	1242	1,37997	11,36562
	15	1634	750	95	1600	1/2"	39,0	5,0	2693	1331	1,37997	12,17745
	16	1634	800	95	1600	1/2"	41,6	5,3	2872	1419	1,37997	12,98928
1735	4	1769	200	95	1735	1/2"	11,2	1,4	770	381	1,37672	3,52528
	5	1769	250	95	1735	1/2"	14,0	1,8	962	476	1,37672	4,40660
	6	1769	300	95	1735	1/2"	16,8	2,1	1154	571	1,37672	5,28792
	7	1769	350	95	1735	1/2"	19,6	2,5	1347	666	1,37672	6,16924
	8	1769	400	95	1735	1/2"	22,4	2,9	1539	762	1,37672	7,05056
	9	1769	450	95	1735	1/2"	25,2	3,2	1732	857	1,37672	7,93188
	10	1769	500	95	1735	1/2"	28,0	3,6	1924	952	1,37672	8,81320
	11	1769	550	95	1735	1/2"	30,8	3,9	2116	1047	1,37672	9,69452
	12	1769	600	95	1735	1/2"	33,6	4,3	2309	1142	1,37672	10,57584
	13	1769	650	95	1735	1/2"	36,4	4,7	2501	1238	1,37672	11,45716
	14	1769	700	95	1735	1/2"	39,2	5,0	2694	1333	1,37672	12,33848
	15	1769	750	95	1735	1/2"	42,0	5,4	2886	1428	1,37672	13,21980
	16	1769	800	95	1735	1/2"	44,8	5,7	3078	1523	1,37672	14,10112
1800	4	1834	200	95	1800	1/2"	11,6	1,5	794	393	1,37515	3,66020
	5	1834	250	95	1800	1/2"	14,5	1,8	993	492	1,37515	4,57525
	6	1834	300	95	1800	1/2"	17,4	2,2	1191	590	1,37515	5,49030
	7	1834	350	95	1800	1/2"	20,3	2,6	1390	688	1,37515	6,40535
	8	1834	400	95	1800	1/2"	23,2	3,0	1588	786	1,37515	7,32040
	9	1834	450	95	1800	1/2"	26,1	3,3	1787	885	1,37515	8,23545
	10	1834	500	95	1800	1/2"	29,0	3,7	1985	983	1,37515	9,15050
	11	1834	550	95	1800	1/2"	31,9	4,1	2184	1081	1,37515	10,06555
	12	1834	600	95	1800	1/2"	34,8	4,4	2382	1180	1,37515	10,98060
	13	1834	650	95	1800	1/2"	37,7	4,8	2581	1278	1,37515	11,89565
	14	1834	700	95	1800	1/2"	40,6	5,2	2779	1376	1,37515	12,81070
	15	1834	750	95	1800	1/2"	43,5	5,5	2978	1475	1,37515	13,72575
	16	1834	800	95	1800	1/2"	46,4	5,9	3176	1573	1,37515	14,64080

ANTEPRIMA	n. of sections	dimensions mm				Ø connec- tions	empty weight Kg ca.	contents water litres	heat output EN 442		exponent n	coefficient Km
		A overall height	B width	C depht	D pipe centres				ΔT 50°C	ΔT 30°C		
									Watt	Watt		
2000	4	2034	200	95	2000	1/2"	12,8	1,6	868	431	1,37033	4,07896
	5	2034	250	95	2000	1/2"	16,0	2,0	1086	539	1,37033	5,09870
	6	2034	300	95	2000	1/2"	19,2	2,4	1303	647	1,37033	6,11844
	7	2034	350	95	2000	1/2"	22,4	2,8	1520	755	1,37033	7,13818
	8	2034	400	95	2000	1/2"	25,6	3,2	1737	862	1,37033	8,15792
	9	2034	450	95	2000	1/2"	28,8	3,7	1954	970	1,37033	9,17766
	10	2034	500	95	2000	1/2"	32,0	4,1	2171	1078	1,37033	10,19740
	11	2034	550	95	2000	1/2"	35,2	4,5	2388	1186	1,37033	11,21714
	12	2034	600	95	2000	1/2"	38,4	4,9	2605	1294	1,37033	12,23688
	13	2034	650	95	2000	1/2"	41,6	5,3	2822	1401	1,37033	13,25662
	14	2034	700	95	2000	1/2"	44,8	5,7	3039	1509	1,37033	14,27636
	15	2034	750	95	2000	1/2"	48,0	6,1	3257	1617	1,37033	15,29610
	16	2034	800	95	2000	1/2"	51,2	6,5	3474	1725	1,37033	16,31584

The heat output of the Global radiators is seen in the results of the tests carried out in accordance with the EN 442 standard

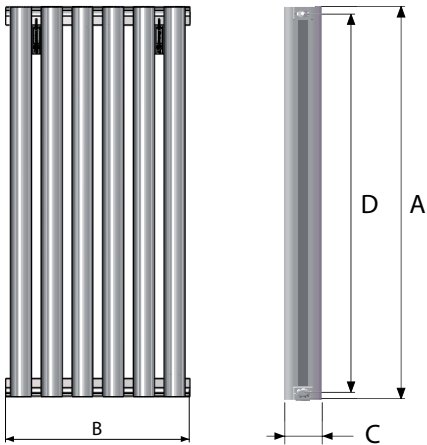

The highest heat output can be obtained by mounting the radiators observing the following distances:
 = 19 - 24 mm from the wall
 ≥ 100 mm from the floor
 ≥ 100 mm from the shelf or window-sills

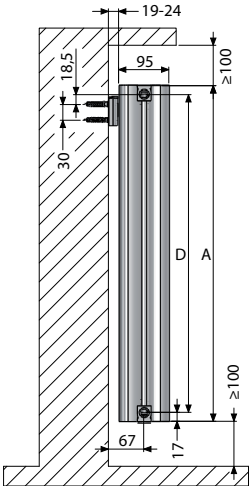

In order to prevent thermal expansion of the system from causing noise at the heaters, it is recommended to position the plastic brackets (art. A260, included in the supply) in the centre of the space provided.



Thermal performance according to EN 442

The heat output of the Global sections highlighted in the catalogue are certified in accordance with the EN 442 standard, drawn up to respond to the standardisation requirements of heat output in the Member States of the European Community. The advantages of a low temperature system will generate:

- lower fuel consumption due to the decrease in passive losses of thermal energy from boilers, pipes and heaters;
- improved hygiene of heated environments: this solution limits the convective motion of the air to the least necessary;
- lower thermal gradients in heated rooms with a consequent improvement of environmental comfort.

Heat output with ΔT other than 50°C and 30°C

The variation in heat output (P) is calculated by applying the characteristic equation $P = Km \cdot \Delta T^n$

where **P** = heat output
Km = characteristic coefficient of each radiator model
n = distinctive coefficient of the heating element
ΔT = the resultant of this equation $t_m - t_a$

where **t_m** = $t_e + t_u / 2$
t_e = entry water temperature
t_u = exit water temperature
t_a = room temperature (standard 20°C)
t_m = mean water temperature

Example Anteprima 1800/10 sections, ΔT 40°C
 $P = Km \cdot \Delta T^n \rightarrow P = 9,15050 \cdot 40^{1,37515} = 1461 \text{ Watt}$

RADIATORS FOR ARCHITECTURE ACCESSORIES



L-SHAPED TOWEL RAILS
A266 white mm 300 (recommended up to 6 sections)
A266 special colours mm 300 (recommended up to 6 sections)
A267 white mm 400 (recommended over 8 sections)
A267 special colours mm 400 (recommended over 8 sections)



HANDY HOOK GRIP
A265 white
A265 special colours

ACCESSORIES INCLUDED FOR ANTEPRIMA

n. 2/3 art. A260 brackets
art. A011 1/2" white or chrome plug (for coloured radiators)
n. 1 art. A041 1/2" white manual air vent valve or art. A038 chrome (for coloured radiators)

- Grids and hole plugs are supplied in the same colour as the radiator
- Chrome grids and hole plugs are supplied on request; free of charge for coloured radiators, at an extra charge for white radiators according to the price list
- Anteprema radiators can also be fitted with a bottom connection (50 mm pipe centres), for underfloor pipes (G-H-i-L-M configurations) at a charge of € 10,00 net each radiator

A260 white bracket
A260 special colours bracket

A268 white grid
A268 chrome or special colours grid

A011 1/2" white blind plug

A011 1/2" chrome blind plug

A041 adjustable manual air vent valve - white

A038 adjustable manual air vent valve - chrome

A052 diverter

A019 plug wrench

A018 Cillit HS 23 Combi liquid

A017 RAL 9010 white marker

A010 RAL 9010 white or special colour spray can

CORRECT INSTALLATION, USE AND MAINTENANCE INSTRUCTIONS

- Anteprema radiators can be used in all hot water or vapour heating installations up to 110°C with a working pressure up to 1600 K Pascal -16 bar.
- They can be installed in systems using iron, copper or thermoplastic pipes.
- In order to avoid problems due to deposit and corrosion in the systems it is recommended that the water pH is checked (preferably between 6.5 and 8) and to introduce a suitable inhibitive additive, for instance Cillit-HS 23 Al or similar in the quantity recommended by the manufacturer.
- Automatic or manual air vent valves must be installed on radiators.
- **Avoid complete closure of the radiator shut-off valves in order to allow any gas that there might be inside the same to escape through the automatic air vent valve, which is mandatory in any heating system, thus avoiding possible overpressure that could damage the radiators.**
- **If one or more batteries are to be excluded from the circuit, an automatic air vent must be fitted to each battery.**
- To ensure lasting protection of painting, radiators must not be stored in very wet or damp environments before and after installation such as inside showers, saunas, turkish baths, near swimming pools etc. Paint peeling off on parts of the radiator could cause the formation of aluminium oxide and have the paint completely peeled off. Do not use porous clay humidifiers.
- For the external cleaning of the radiator and surfaces near the radiator, it is necessary to avoid the use of abrasive or chemically corrosive/aggressive products of any nature, as the use of water and neutral detergent is sufficient.
- Performing the operation when the radiators are cold to maintain the original brilliance of the paint over time.
- Do not place weights and/or objects on the radiators. Do not use radiators for any purpose other than heating elements (e.g.: as a support system, as steps, as support for furniture or objects).

HOW TO USE CODES FOR ORDERING

RADIATORS FOR ARCHITECTURE ANTEPRIMA

AN radiator model	0350 pipe centres	10 colour code	06 number of sections	A connection
----------------------	----------------------	-------------------	--------------------------	-----------------

Example **AN03501006A**:
AN Anteprema model; **0350** pipe centres; **10** white colour; **06** number of sections; **A** connection
When ordering radiators in special colours, please specify the Code according to the Colour Card (ref. table at the bottom of page).
The order for the Anteprema model **shall always include the specification of the hydraulic connection**: see diagrams below.

A **B** **C** **D** **E** **F**

G **H** **L** **M**

iw **i** **iz**

* = AIR VENT VALVE
X = DIVERTER
Y = (width tot) – 100 mm

☒ In the configurations E-F-G-H-i-L-M the radiators are supplied already with diverter (art. A052 included).

The central connection, configuration **-i-** can only be set up with an **odd number of elements**. With an **even number of elements**, the left **-iw-** or right **-iz-** position in relation to the intermediate axis must be indicated, with a shift of 50 mm.

☒ For single-pipe systems, **configuration G-H-i only**, Anteprema radiator **shall be installed with appropriate valves** (art. A404 or similar), with 50 mm pipe centres.

cod. 10 white glossy	cod. 11 white sand	cod. 12 white matt	cod. 01 ivory glossy RAL 1013	cod. 05 metallic matt beige	cod. 06 metallic matt quartz	cod. 07 metallic matt dark grey	cod. 08 metallic matt silver grey	cod. 09 metallic matt rust	cod. 14 black matt

standard colour **special colours** see the Colour Card

The colours are indicative. For technical printing reasons, it is no possible to faithfully reproduce the paints used. The colour of the products supplied may differ from that shown in this catalogue.

GLOBAL provides a 10 year warranty from the production date

The conventional warranty grants the sole right to free replacement of the radiator which, due to defects originating from defects in material or workmanship, is not fit for purpose or its ordinary intended use. Replacement radiators shall be delivered free of charge to the retailer who sold the radiator to the end customer or his installer.

The warranty is valid on the condition that the installation and the system to which the product is connected are performed by qualified/authorised personnel to top workmanship standards and in compliance with the regulations and requirements of the sector in force; it is also valid on the condition that there has been full compliance with warnings and instructions for proper installation, use and maintenance of the product indicated in the technical documentation under the paragraph entitled *correct installation, use and maintenance instructions*, available and downloadable from the *TECHNICAL INFO* section on the globalradiatori.it website. The warranty is regulated by further conditions indicated in the technical catalogue and the CONVENTIONAL WARRANTY section on the globalradiatori.it website.

more than
50
YEARS
OF HISTORY

PRODUCTION
made in Global
ITALY

**RESEARCH &
DEVELOPMENT**
made in Global
ITALY

DESIGN
made in Global
ITALY

60.000 sqm
PRODUCTION
AREA

250
EMPLOYEES

more than
900
DISTRIBUTORS

more than
50
COUNTRIES
WORLDWIDE



GLOBAL di Fardelli Ottorino & C. s.r.l.

24060 ROGNO (BG) ITALIA • via Rondinera, 51
tel. ++39 **035977111** • fax ++39 **035977110**
globalradiatori.it • info@globalradiatori.it



Copyright GLOBAL ©

The images, logos and products included in this catalogue must not be reproduced in any manner or using any medium without prior permission of the parent company. Global reserves the right to change the products and data used in its catalogues at any moment in time.